
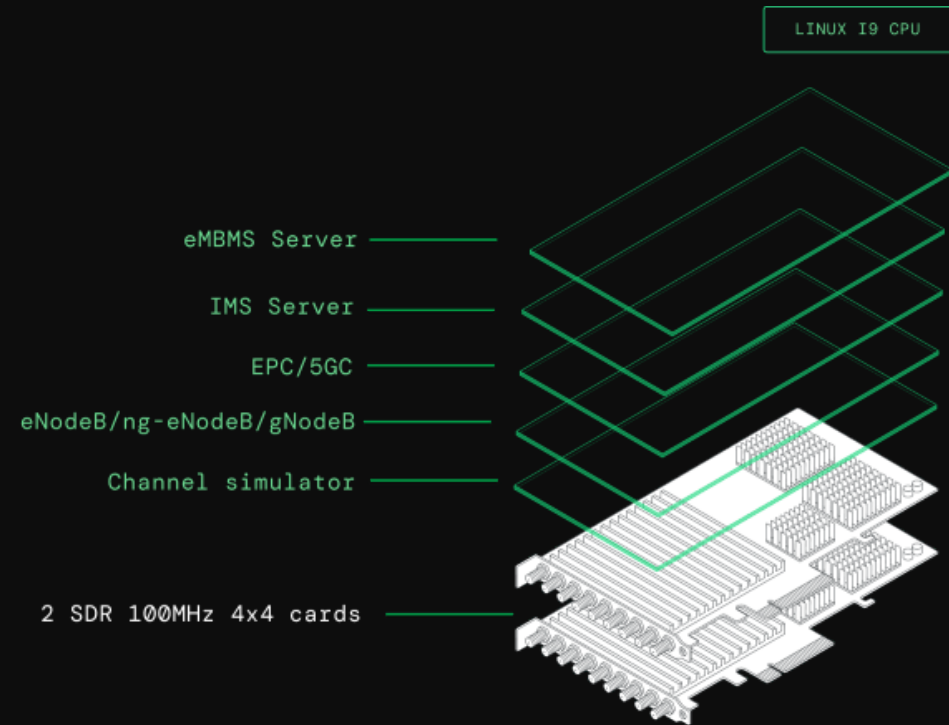


AMARI Callbox Advanced

Overview

The AMARI Callbox serves as the ideal solution for testing devices across 5G NSA and SA, LTE, LTE-M, and NB-IoT. Functioning as a 3GPP compliant eNB/gNB and EPC/5GC, it facilitates functional and performance testing, powered by a carrier-grade software suite.

The AMARI Callbox Advanced is one of the 3 AMARI Callboxes designed for 5G. The callbox provides 2 NR Cells 100MHz 4x4 at the same time. Thanks to an additional FR2 Package, the AMARI Callbox Advanced can also deliver one cell 100MHz 2x2 in mmWave (FR2).

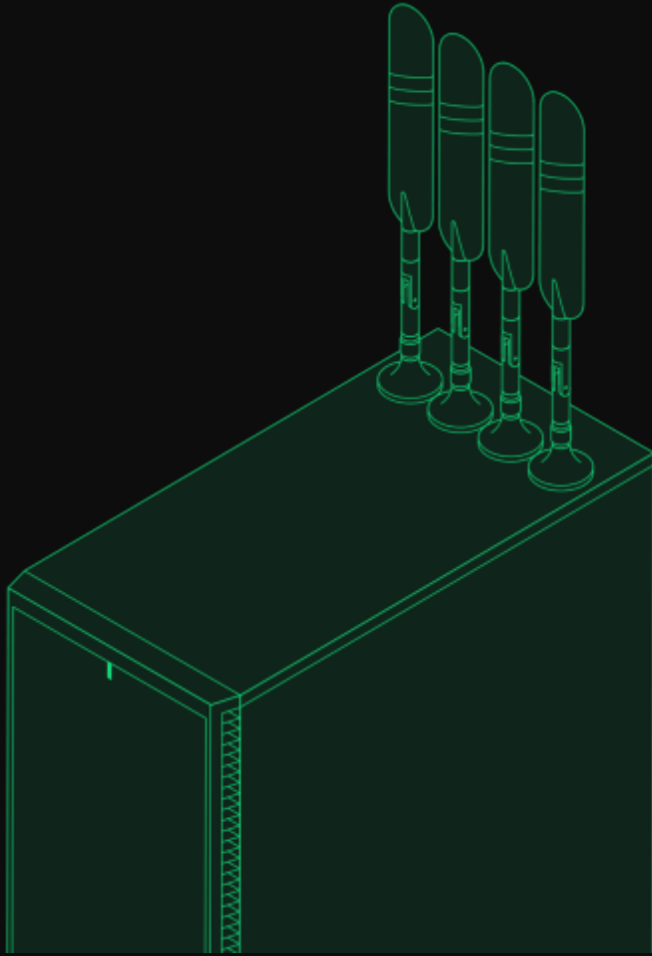

Capabilities



5G

The callbox can act as a 5G standalone mode (SA) or 5G non-standalone mode (NSA) network. 5G Non Terrestrial Network (NTN) and 5G Reduced Capacity (RedCap) are also supported.



LTE

Even if it is designed for 5G, this callbox provides with the best of Amarisoft LTE technology.



LTE-M

The callbox supports LTE-M in both FDD and TDD to connect CAT-M1 devices.



NB-IOT

The callbox supports standalone, in-band and guard-band NB-IOT to connect NB1 and NB2 devices. It also supports Non Terrestrial Network (NTN) NB-IOT.



Up to 1000 UEs

Powered by a macro base station software, depending on the callbox model and configuration, it can handle up to 1000 concurrent active UEs.



3 Gbps - 2 Gbps

Depending on the callbox configuration and the UE capabilities, the callbox can deliver up to 3 Gbps in downlink and 2 Gbps in uplink.



Handover

On a single callbox, intra eNB/gNB handover is supported. Inter eNB/gNB handover is supported using two callboxes.



Carrier aggregation

The callbox can aggregate multiple TDD and FDD LTE, NR FR1 and NR FR2 cells for high throughput testing.



VoLTE VoNR VoWiFi

The embedded IMS Server allows VoLTE, VoLTE, VoNR, VoNR, SMS and emergency call testing. The embedded N3IWF allows VoWiFi by connecting an external WiFi access point.

Highlighted features



Logging and Measurements

Selective logging and display of all layers of 3GPP LTE and NR stacks as well as useful graphs and analytic tools.

[LOG EXAMPLE](#) ↗



Automatic Test Setup and Scripting

Extensive WebSocket API allowing to send remote commands to eNodeB, ng-eNodeB, gNodeB, EPC and 5GC to ease test automation.

[TUTORIAL](#) ↗



Easy Configuration

Easy configuration thanks to JSON files with example configurations already included in each software release for eNodeB, ng-eNodeB, gNodeB, EPC and 5GC.



End to End Data Testing

Running on top of standard Linux in user space mode allowing easy integration with IP services.



Channel Simulation

Simulation of different DL channel types as per 3GPP models specified in 36.101 and 38.141 specifications.

[TUTORIAL](#) ↗



Feature testing

Test features to override the nominal protocol behavior in order to simulate error cases.



High Performance

Highly optimized software supporting multiple UEs and cells and high data rates in LTE and NR.



3GPP Features

Early access to 3GPP features for rapid validation of features under development.




Frequency Agnostic

Support of a wide range of FDD and TDD frequency bands even nonstandard ones allowing to test in Sub-6GHz and mmWave. mmWave available on the AMARI Callbox Advanced, Ultimate and Extreme as an option.

[TUTORIAL](#) ↗

Architecture

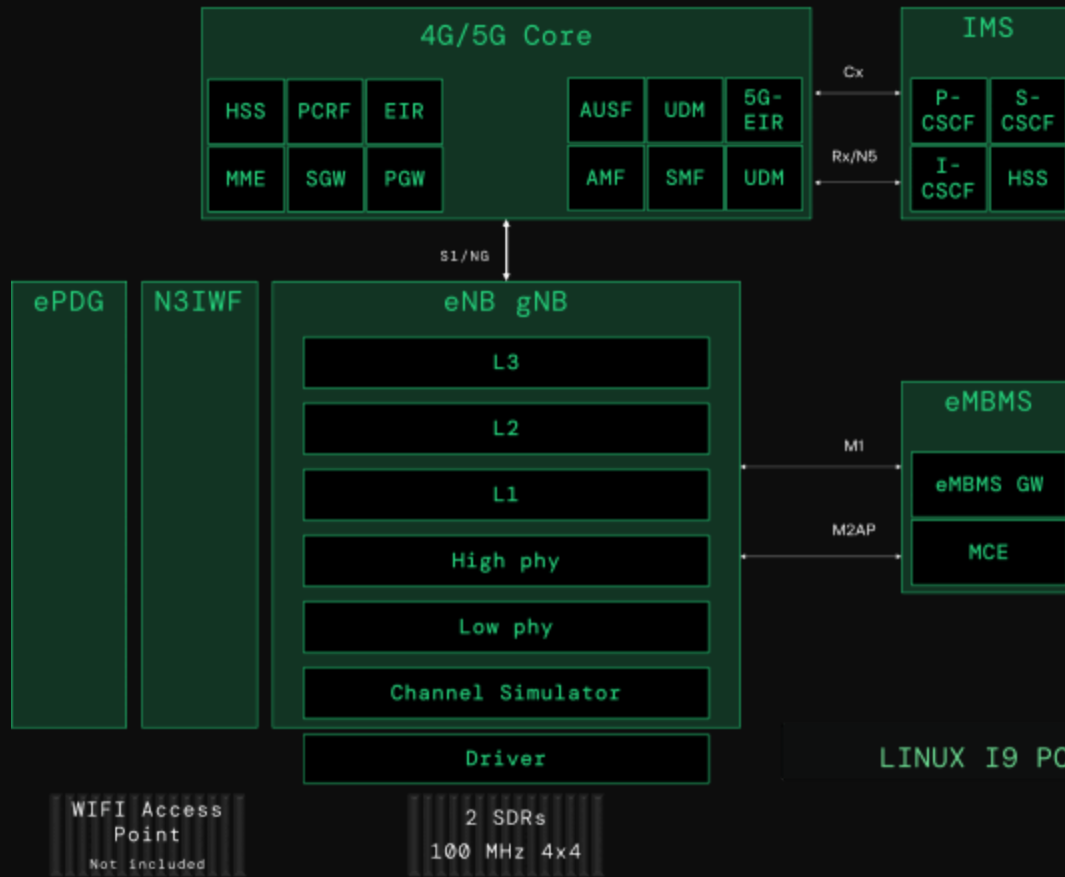

Possible RAN Configurations

RAN Configuration constraints

The AMARI Advanced RAN configuration is subject to constraints stemming from:

- 1- The characteristics and the number of Software Defined Radios (SDRs) it incorporates.
- 2- The CPU power, specially for 5G FR2.

1- Constraints Arising from SDRs:

The Callbox integrates two SDR Cards, with each SDR capable of supporting two independant SISO or 2x2 MIMO 100 MHz channel or one 4x4 MIMO channel. This provides users with the following combinations:

Two 100 MHz 4x4 channels

One 100 MHz 4x4 channel combined with two 100 MHz 2x2/SISO channels

Four 100 MHz 2x2/SISO channels

Each channel can support multiple contiguous cells, provided that the total bandwidth and MIMO layers of the channel are not exceeded.

2- Constraints Arising from CPU and Software License:

The limitations imposed by the software license restricts the total bandwidth of cells multiplied by the number of MIMO layers to 800 MHz.

Only one cell 5G FR2 100MHz 2x2 cell is allowed

RAN Configuration examples


4G LTE	4 cells 20 MHz 2x2
	2 cells 20 MHz 4x4
5G NR SA Mode	4 FR1 cells 100 MHz 2x2
	2 FR1 cells 100 MHz 4x4
	1 FR1 cell 100 MHz 4x4 + 1 FR2 cell 100 MHz 2x2
5G NR NSA Mode	1 5G NR 100 MHz 4x4 + 1 LTE 20 MHz 4x4
	2 FR1 cells 5G NR 100 MHz 2x2 + 2 cells LTE 20 MHz 2x2
	1 FR2 cell 5G NR 100 MHz 2x2 + 1 cells LTE 20 MHz 4x4
NB-IOT	4 NB-IoT standalone cells
	4 LTE cells with an in-band or guard-band NB-IoT cell each
LTE-M	4 LTE cells with CAT M1 support

Hardware components

Callbox and accesories

Callbox Specification	
Dimensions H × W × D	46.5 cm × 23.3 cm × 53.3 cm
Weight	14 kg
# AMARI PCIe SDR 100 4x4 Cards	2
Power supply voltage	100 - 240V AC
CPU	Intel i9

Accesories



4 antennas, 4 RF combiners and 16 RF cables SMA male to male RG405 are included.




5 programmable SIM Cards are included and already registered in the Callbox core user database.

AMARI PCIe SDR 100 4x4 Card

AMARI PCIe SDR 100 4x4 is a software defined radio (SDR) card based on AD9361 2x2 RF transceivers. It supports MIMO 4x4, FDD and TDD operations in any frequency between 500 MHz and 6GHz. It has an integrated GPS for accurate time and frequency synchronization. The cards can be easily chained thanks to a provided cable allowing clock and PPS propagation in between the cards. This will facilitate testing of higher MIMO layers and carrier aggregation. The total bandwidth of the card is 100 MHz, and its output power is around 12 dBm depending on the frequency used. The card requires at least gen 3 PCIe slot. This RF is used in AMARI Callbox Advanced, AMARI Callbox Ultimate, AMARI Callbox Extreme, AMARI UE Simbox E Series and AMARI UE Simbox MBS Series products.

[TECHNICAL DOC](#) 

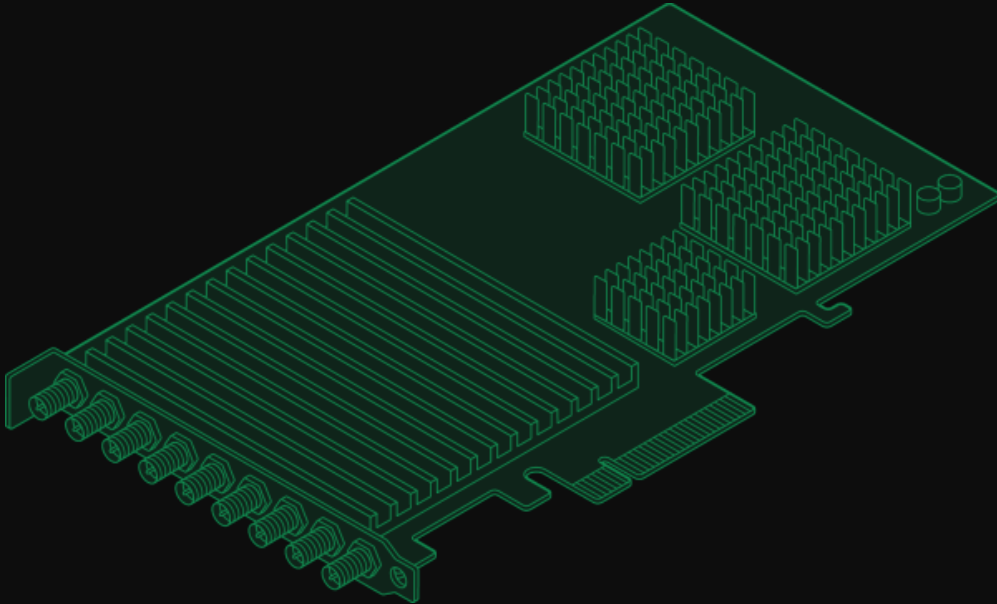


AMARI PCIe SDR 100 4x4 Card technical specification

Dimensions H × W × D	2 cm × 13 cm × 22 cm
Weight	0.2 kg
Frequency range	500 MHz to 6.0 GHz
RF bandwidth	1.4 MHz to 100 MHz
Power supply voltage	12 V DC input
Operation mode	FDD and TDD
MIMO	4x4
ADC/DAC sample rate	122.88 MS/s
ADC/DAC resolution	12 bits
Frequency accuracy	< 1 ppm
PCIe minimum requirements	8x / Gen 3
LTE 20MHz 64QAM EVM	<4% RMS (f<3.5 GHz) <2% RMS (f<2.6 GHz)
Synchronization	Internal clock , PPS signal, GPS , Reference external clock (LVDS)

AMARI FR2 Hardware Package

The AMARI FR2 HW Package enables mmWave technology on the AMARI Callbox Advanced, Ultimate, and Extreme and AMARI UE Simbox MBS models. It comprises a UDC (Up-Down Converter), RF cables, and horn antennas. The UDC serves to convert the sub6 signal from the AMARI PCIe SDR 100 4x4 Card into mmWave signal, and vice versa.

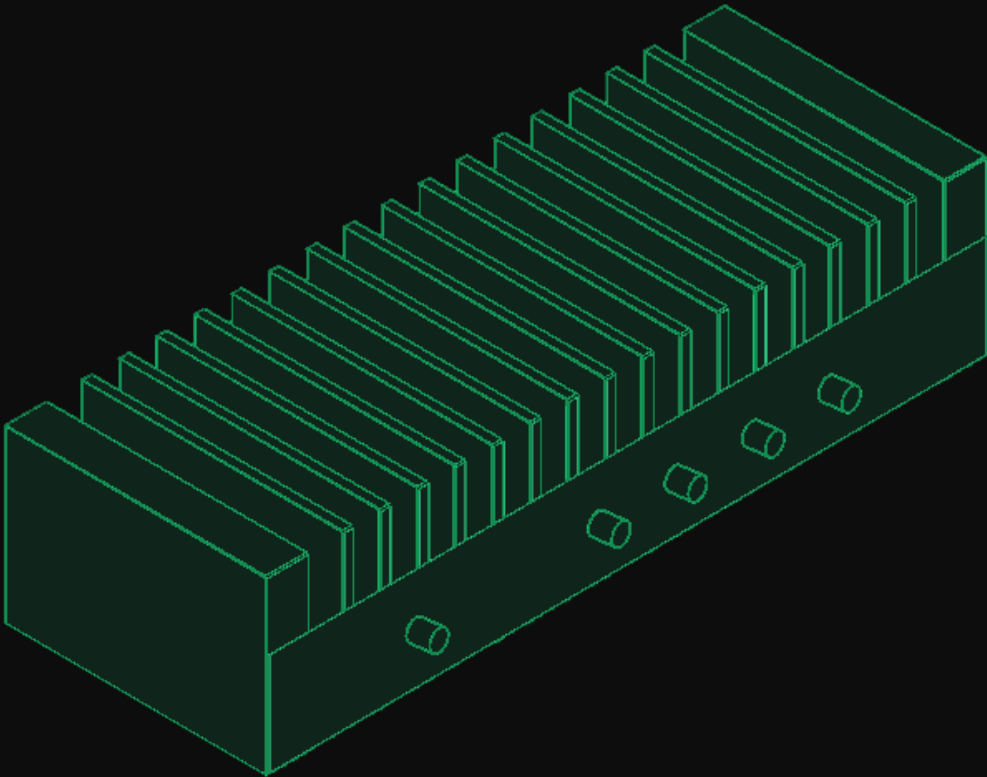

AMARI UDC technical specification

Dimensions H × W × D	4 cm × 9.5 cm × 27.5 cm
Weight	0.2 kg
Frequency range	two SKUs: 24 to 30 GHz or 37 to 40 GHz
RF bandwidth	1 GHz
Power supply voltage	12 V DC input


Software components

vRAN eNodeB gNodeB

A release 17 full software eNodeB gNodeB including layer3, layer 2, layer1 and physical layer. It also includes a channel simulator. It connects to a split 8 or split 7.2 radio front end through an open API via a driver. It supports a standard S1/NG interface to connect a 4G or 5G core network. The eNodeB gNodeB is configurable through hundreds of parameters in a text file in JSON format. It has a WebSocket API for automation, and a command line interface.

[DETAILED SPEC](#)

[TECHNICAL DOC](#)

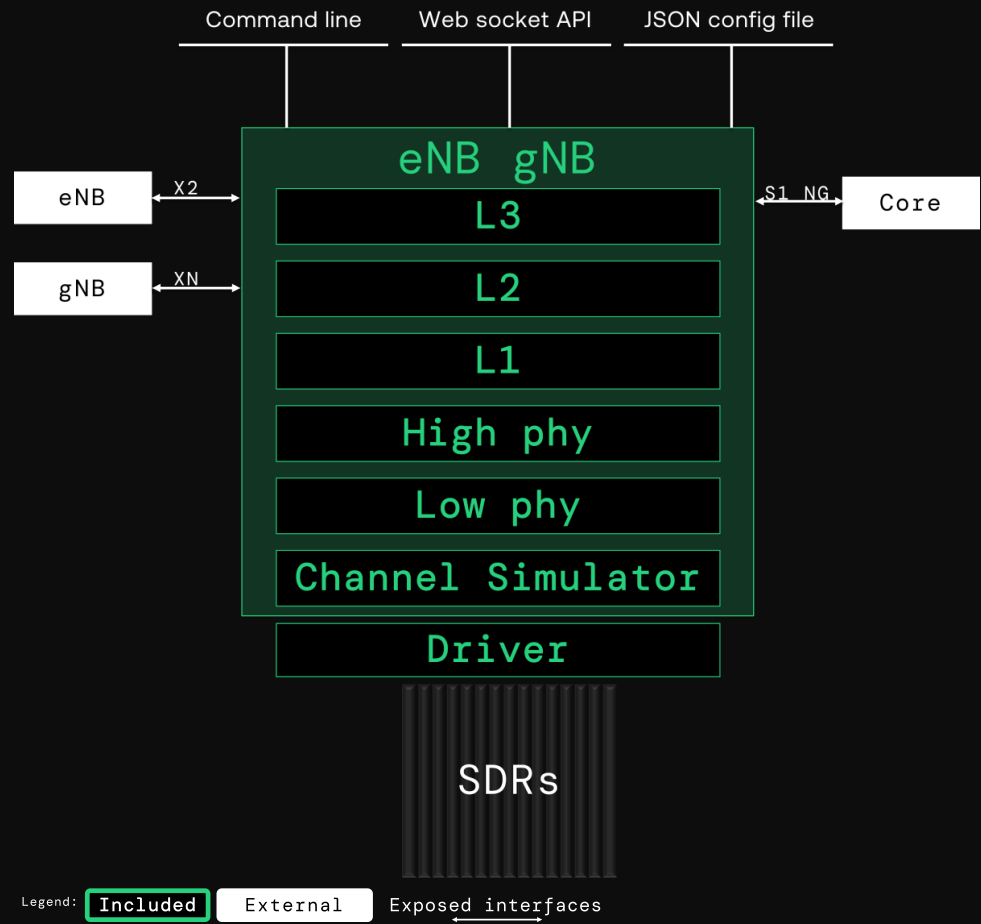


4G 5G CORE

A compact release 17 core network with built-in MME, SGW, PGW, PCRF, HSS, EIR, ePDG, AMF, AUSF, SMF, UPF, UDM and 5G-EIR.

[DETAILED SPEC ↗](#)

[TECHNICAL DOC ↗](#)

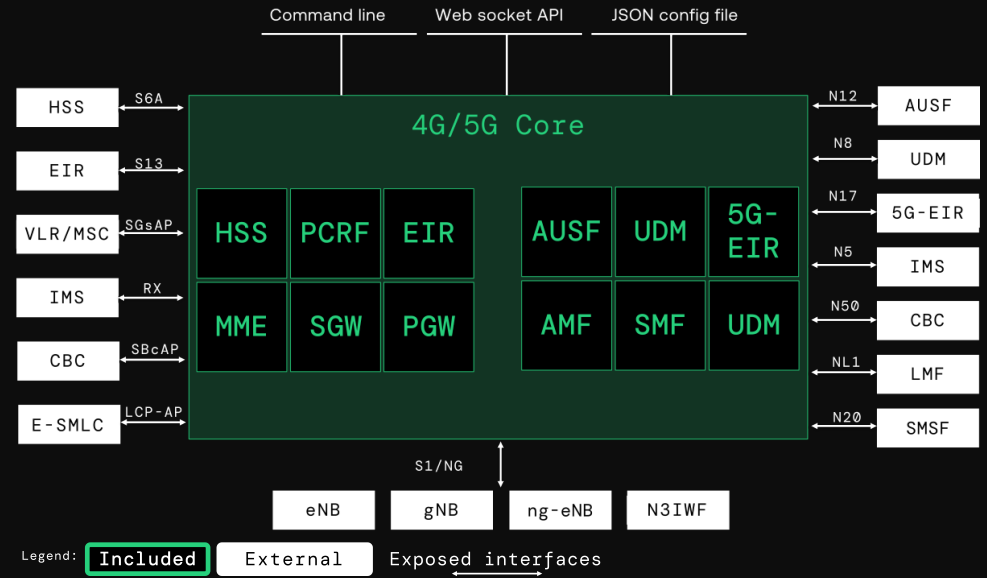


IMS Server

An IMS standalone simple server. It has a built-in P-CSCF, I-CSCF, S-CSCF, HSS.

[DETAILED SPEC ↗](#)

[TECHNICAL DOC ↗](#)

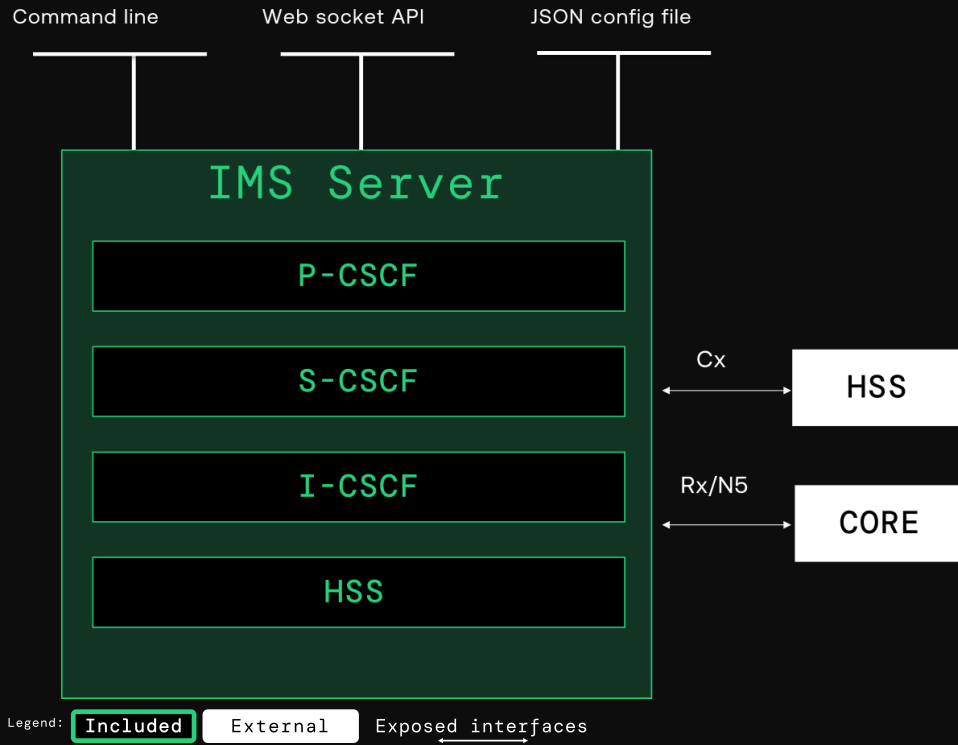


eMBMS Gateway

An LTE multimedia broadcast multicast services gateway with built-in MCE.

[DETAILED SPEC ↗](#)

[TECHNICAL DOC ↗](#)

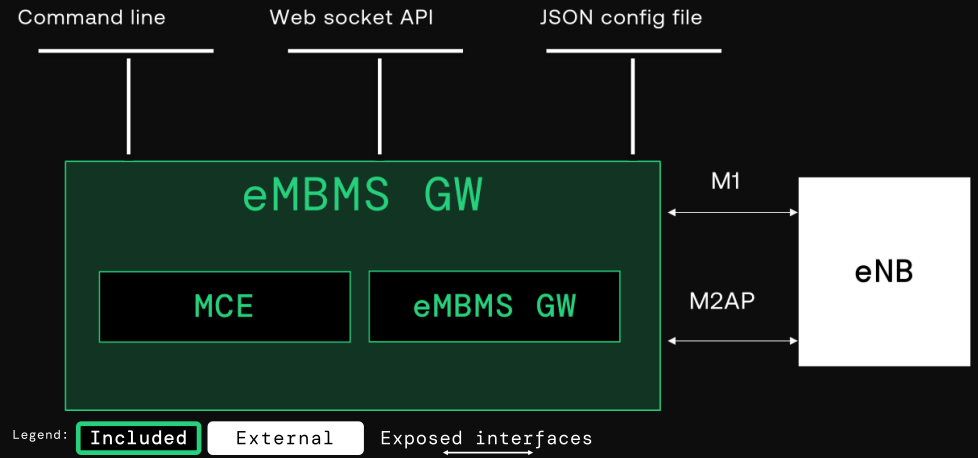

End to end device testing



Specific feature device testing



4G 5G network element testing



Private network



Operator conformance testing



FTW gateway testing



Web: www.amarisoft.com
Mail: sales@amarisoft.com
Linkedin: www.linkedin.com/company/amarisoft
Twitter: twitter.com/amarisoft

*HQ in Paris
16-18 Rue Rivay,
92300 Levallois Perret
FRANCE*

*South of France Office
80, Route des Lucioles, Bat. L2,
06560 Sophia antipolis
FRANCE*

Last updated : 2024-02-21T10:15:20+00:00